

NERI

Ceiling light
Source: LED
Mounting: ceiling-mounted

Technical sheet
Measures in mm

DESCRIPTION

Compliance

EN 60598-1



Mechanical Information

Height	Dia.	Weight	IP	IK
130mm	110mm	1Kg.	65	08

Electrical characteristics

Voltage	Frequency	Cos ϕ	Insulation class	Operative Temp.
AC 240V	50Hz	> 0.9	CL I	-20°C to +50°C



Fixing

- Suitable for ceiling-mounting installation.

Materials

- Aluminium.
- Tempered glass.
- Silicon.
- Stainless steel.

Structure - Main components

- The light fixture is made of aluminium.
- Screen in tempered glass.
- Gasket in silicon.
- Stainless steel screws for fixing.
- Silicon grommet for cable entry.

Electrical auxiliaries



- Single cable entry through grommet.
- One cable of 0.3M, 3Cx0.75 sq.mm. supplied.
- Driver-standard on-off inbuilt power supply.

Operations and maintenance


- A scheduled maintenance program must be carried out on the Installation.
- Disconnect the electrical supply before maintenance operation.

Finish

- Standard color - Black.
- Powder coated for high corrosion resistance.

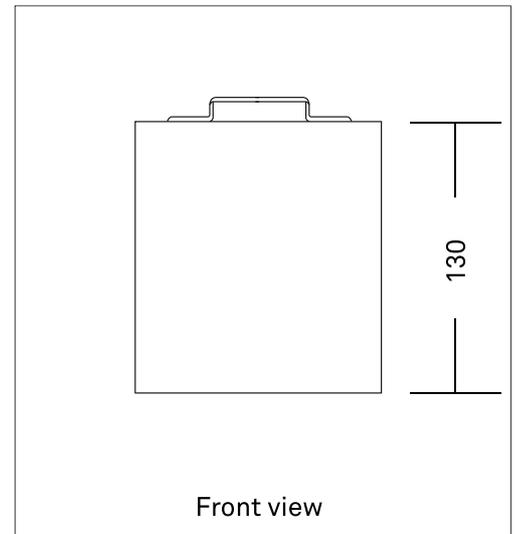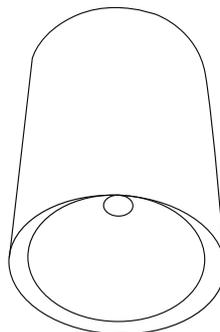

Front view

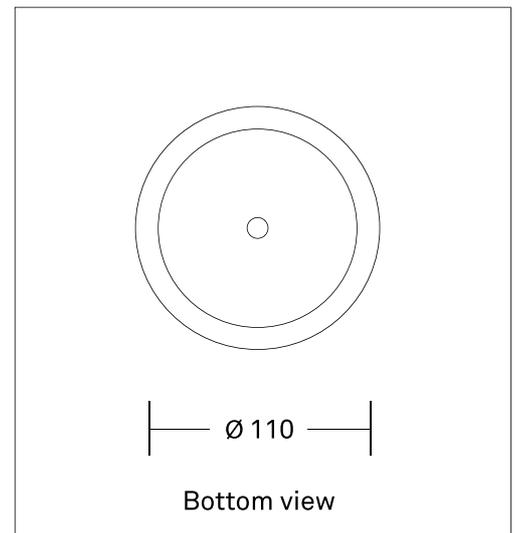

Bottom view

NERI

Ceiling light
Source: LED
Mounting: ceiling-mounted

Category: Comfort
Optics: 45°/60°/90°
Screen: Clear

Technical sheet
Measures in mm

DESCRIPTION

Optics

Lighting distribution	Glass
45°/60°/90°	Clear

- Reflector made of PC.

Luminous flux

3000K		System	
Code	lm	W	lm/W
NCL-110R	1600	20	80

Luminous flux

4000K		System	
Code	lm	W	lm/W
NCL-110R	1700	20	85

- The energetic values in the table are referred to the system.
- LED source - COB
- Heat sink integrated in the body.
- Lifetime (EN 62722-2-1, LM80 data): L70 > 50,000hours.
- Colour Rendering Index: Ra > 80.

Driver

- Standard on-off inbuilt power supply.

Accessories (Not included in standard product, to be ordered separately)



IP 68 2 Way connector for suitable cable diameter (6.5mm - 9.5mm)



IP 68 3 Way connector for suitable cable diameter (6.5mm - 9.5mm)

PHOTOMETRIC CURVES

Lighting distribution

