

# NERI


Flood Light- NFL-5-400  
Source: LED  
Mounting: Surface Mounted

Technical sheet  
Measures in mm

## DESCRIPTION

### Compliance

EN 60598-1




### Mechanical Information

Height	Width	Depth	Weight	IP	IK
590mm	500mm	65mm	8Kg.	66	08

### Electrical characteristics

Voltage	Frequency	Cos φ	Insulation class	Operative Temp.
AC230V	50Hz	> 0.9	CL I	-20°C to +50°C

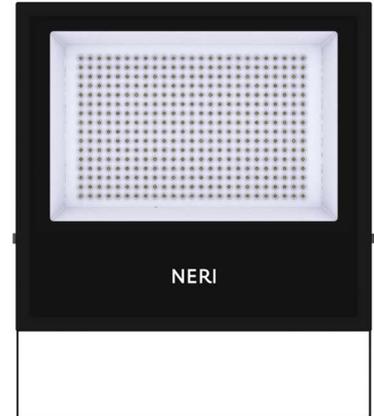

### Fixing

- Suitable for surface mounting installation.

### Materials

- Die-cast aluminium.
- Polycarbonate.
- Tempered glass.
- Silicon.
- Stainless steel.

### Structure - Main components

- Body in rectangular shape made of high pressure die cast aluminium .
- Lens made of polycarbonate .
- Screen made of clear tempered Glass.
- Silicon gasket between frames ensures the ingress protection.
- Stainless steel screws for fixing.

### Electrical auxiliaries



- Cable entry through cable gland.
- One cable of 0.3M, 3Cx1.5 sq.mm. supplied.
- Driver-standard on-off inbuilt power supply.

### Operations and maintenance

- A scheduled maintenance program must be carried out on the Installation.
- Disconnect the electrical supply before maintenance operation.

### Finish

- Standard color-Black.
- Powder coated for high corrosion resistance.

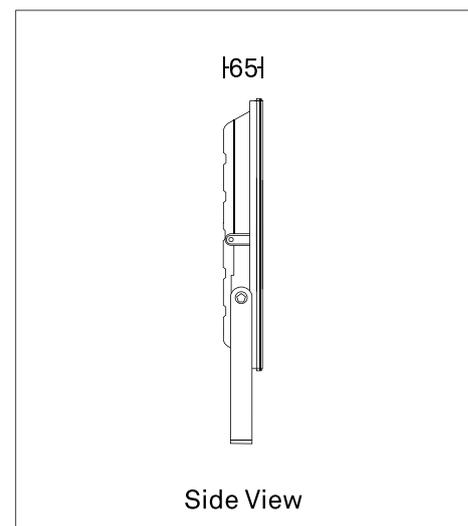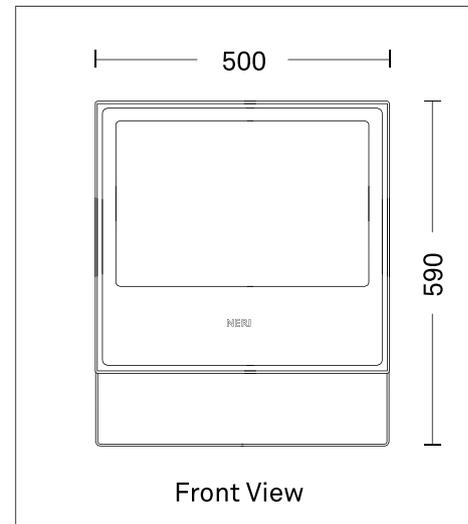

## DESCRIPTION

### Optics

Lighting distribution	Screen
60°/90°/Type-II	Clear

- Lens made of PC.

### Luminous flux

3000K			System
Code	lm	W	lm/W
NFL-5-400	44000	400	110

### Luminous flux

4000k			System
Code	lm	W	lm/W
NFL-5-400	48000	400	120

- The energetic values in the table are referred to the system.
- LED source - SMD
- Heat sink integrated in the body.
- Lifetime (EN 62722-2-1, LM80 data): L70 > 50,000hours.
- Colour Rendering Index: Ra > 80.

### Driver

- Standard on-off inbuilt power supply.

### Accessories ( Not included in standard product, to be ordered separately )






IP 68 3 Way connector for suitable cable diameter ( 6.5mm - 9.5mm )



IP 68 2 Way connector for suitable cable diameter ( 6.5mm - 9.5mm )

## PHOTOMETRIC CURVES

### Lighting distribution

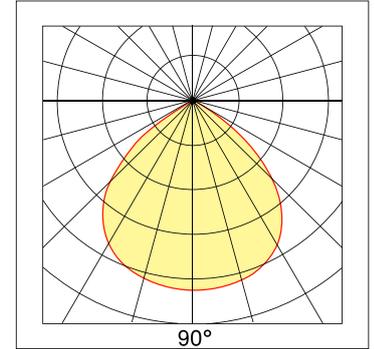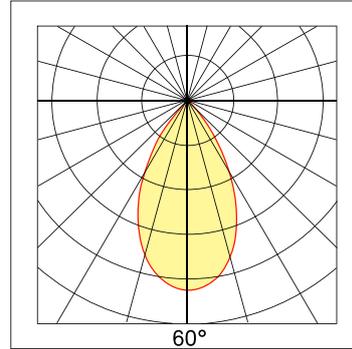

### Type II

