

DESCRIPTION

Compliance



EN 60598-1

Mechanical Information

Height	Depth	Length	Weight	IP
125mm	60mm	225mm	1.2Kg.	65

Electrical characteristics

Voltage	Frequency	Cos ϕ	Insulation class	Operative Temp.
AC230V	50Hz	> 0.9	CL I	-20°C to +50°C



Fixing

- Suitable for recess mounting installation.

Materials

- Die-cast aluminium.
- ABS.
- Frosted glass.
- Silicon.
- Stainless steel .

Structure – Main components

- The light fixture is made die-cast aluminium.
- Barrel made of ABS.
- Diffused screen made of frosted glass.
- Gasket in silicon.
- Stainless steel screws for fixing.

Electrical auxiliaries



- Single cable entry through cable gland.
- One cable of 0.3M, 3Cx0.75 sq.mm. supplied.
- Driver-standard on-off inbuilt power supply.

Operations and maintenance

- A scheduled maintenance program must be carried out on the Installation.
- Disconnect the electrical supply before maintenance operation.

Finish

- Standard color - Black/Grey.
- Powder coated for high corrosion resistance.

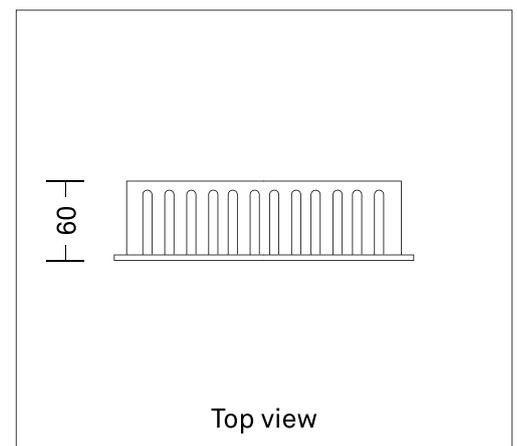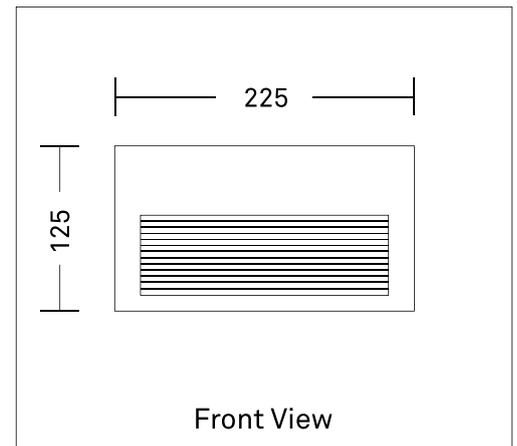

DESCRIPTION

Optics

Lighting distribution	Screen
Asymmetric	Frosted

- Diffused screen

Luminous flux

3000K		System	
Code	lm	W	lm/W
NSL-5-10	400	10	40

Luminous flux

4000K		System	
Code	lm	W	lm/W
NSL-5-10	450	10	45

- The energetic values in the table are referred to the system.
- LED source - SMD
- Heat sink integrated in the upper frame.
- Lifetime (EN 62722-2-1, LM80 data): L70 > 50,000hours.
- Colour Rendering Index: Ra > 80.

Driver

- Standard on-off inbuilt power supply.

Accessories (Not included in standard product, to be ordered separately)



IP 68 2 Way connector for suitable cable diameter (6.5mm - 9.5mm)



IP 68 3 Way connector for suitable cable diameter (6.5mm - 9.5mm)

PHOTOMETRIC CURVES

Lighting distribution

